

Order No.: 5CL721603 | **GTIN (EAN):** 4058352521588


Product description: CL31Bkhd,rd,1575lm830,DA



CL 31 Bulkhead, wall and ceiling luminaire, primary light control with reflector, primary optical cover: cover panel, of PC, opal, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 1.575lm, luminous efficacy: 105lm/W, light colour: 830, colour temperature: 3000K, control gear: DALI, with terminal, 5-pole, max. 2.5mm², mains connection: 220..240V, AC, 50/60Hz, rated input power: 15W, luminaire housing, round, of aluminium, powder-coated, SITECO metallic grey, diameter: 264mm, height: 63mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, impact resistance: IK09, permissible operating ambient temperature for outdoor applications: -20..+50°C, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	2.0
GTIN (EAN):	4058352521588

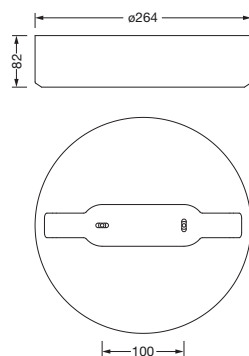

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5CL721603 | **GTIN (EAN):** 4058352521588

Detailed technical description: CL31Bkhd,rd,1575lm830,DA



Key data

- Product type: wall and ceiling luminaire
- Product name: CL 31 Bulkhead
- Order No.: 5CL721603

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: reflector
- Cover: cover panel, opal
- Beam angle: diffuse distribution
- Symmetry: symmetric

Lamps:

- Lamps: with LED
- Rated luminous flux: 1575lm
- Luminous efficacy: 105lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 4 SDCM (initial)
- Rated input power: 15W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK09
- Temperature range (operation): -20...+50°C
- Certification, designation: CE, ENEC

Material, Colour

- luminaire housing: aluminium, powder-coated, SITECO metallic grey, round
- Colour specification: SITECO metallic grey
- Cover: cover panel of PC

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall

Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight



- Diameter: 264mm
- Height: 63mm
- Weight: 2.0kg

Service life

- Rated service life: 60000h (L80/B50) at AT = 25°C

Order No.: 5CL721603 | **GTIN (EAN):** 4058352521588

Dimensions: CL31Bkhd,rd,1575lm830,DA

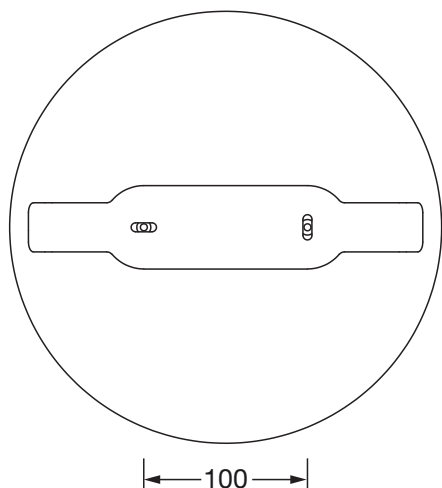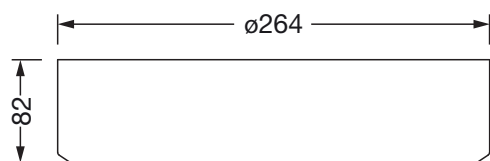

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -